

M 99

Dynamic Microphone

Order # 445.394



FEATURES

- Hypercardioid polar pattern
- Switchable presence accentuation and equalisation for bass drum
- Extremely linear frequency response
- Rugged construction
- Integrated elastic suspension

APPLICATIONS

The M 99 is a dynamic moving coil microphone of studio quality. The tailored frequency response suits many applications from instrument miking to on-air broadcasting. The beyerdynamic TG-X technology used in the M 99 features a strong neodymium magnet system and a mass reduced special Mylar diaphragm to give the microphone a powerful reproduction with excellent transient characteristics.

The frequency response is extremely linear and guarantees audio quality which has until now, only been achieved by using high-quality condenser microphones.

The frequency select switch at the base of the microphone allows three settings of equalisation, linear and two optimised settings for vocals and instrument miking. A second switch is for presence accentuation. This allows further adjustment for close miking techniques or kick drum miking. The hypercardioid polar pattern helps eliminate feedback in live applications and allows a good separation between different instruments.

The microphone can operate at very high sound pressure levels without loss of sound quality and virtually no distortion.

The M 99's die cast casing is made of aircraft grade aluminium and finished with an attractive metallic varnish.

SUPPLIED ACCESSORIES

EA 90	Elastic suspension	Order # 452.270
ZKK 740-833	Case	Order # 504.580

OPTIONAL ACCESSORIES

BMC 05 FM BLK	Standard microphone cable XLR-XLR, 5 m long	Order # 434.787
BMC 10 FM BLK	Standard microphone cable XLR-XLR, 10 m long	Order # 434.795
SMC 05 FJ BLK	Standard microphone cable XLR-Jack, 5 m long	Order # 434.809
SMC 10 FJ BLK	Standard microphone cable XLR-Jack, 10 m long	Order # 434.817
GST 400	Microphone stand, 3/8", height 0.90 - 1.65 m, with G 400 boom	Order # 421.308
GST 500	Microphone stand, 3/8", height 0.85 - 1.60 m, with telescopic G 500 boom	Order # 406.252

Germany

Theresienstr. 8
D-74072 Heilbronn
Tel. +49 (0)71 31 / 617-0
Fax +49 (0)71 31 / 617-224
E-mail: info@beyerdynamic.de
Internet: www.beyerdynamic.de

United States

56 Central Ave.
Farmingdale, NY 11735
Tel. +1 (631) 293-3200
Fax +1 (631) 293-3288
E-mail: salesUSA@beyerdynamic.com
Internet: www.beyerdynamic.com

Great Britain





17 Albert Drive
Burgess Hill RH15 9TN
Tel. +44 (0)1444 / 258258
Fax +44 (0)1444 / 258444
E-mail: sales@beyerdynamic.co.uk
Internet: www.beyerdynamic.co.uk

TECHNICAL SPECIFICATIONS


Transducer type	Dynamic	
Operating principle	Pressure gradient	
Frequency response	30 - 18,000 Hz (refer to frequency responses)	
Polar pattern	Hypercardioid	
Open circuit voltage at 1 kHz	3.0 mV/Pa / 2 mV/Pa	
Magnetic field suppression	> 20 dB at 50 Hz	
Nominal impedance	280 Ω	
Load impedance	≥ 1000 Ω	
Diaphragm	Hostaphan®	
Casing	Aluminium/die cast	
Connector	3-pin XLR male	
Dimensions	Length: 163 mm	
	Shaft diameter 23/25 mm	
	Head diameter 56 mm	
Weight (without cable)	421 g	

FREQUENCY RESPONSE & POLAR PATTERN

This polar pattern and frequency response curve (measuring tolerance ± 2.5 dB) correspond to a typical production sample for this microphone.

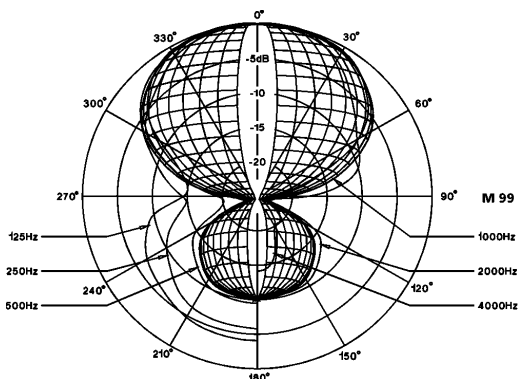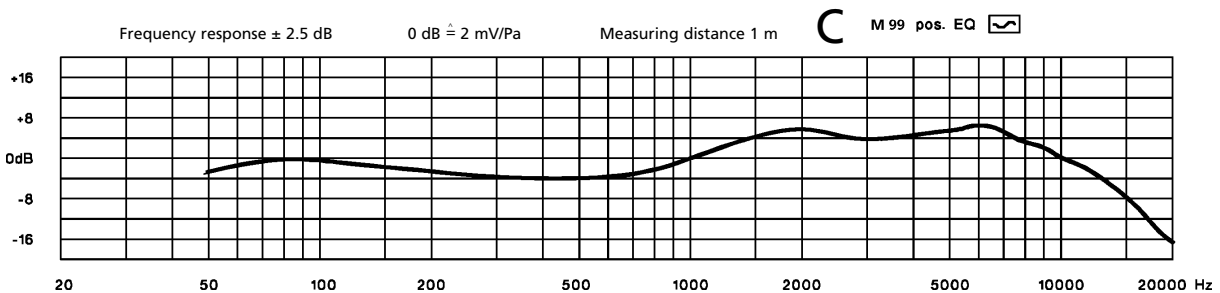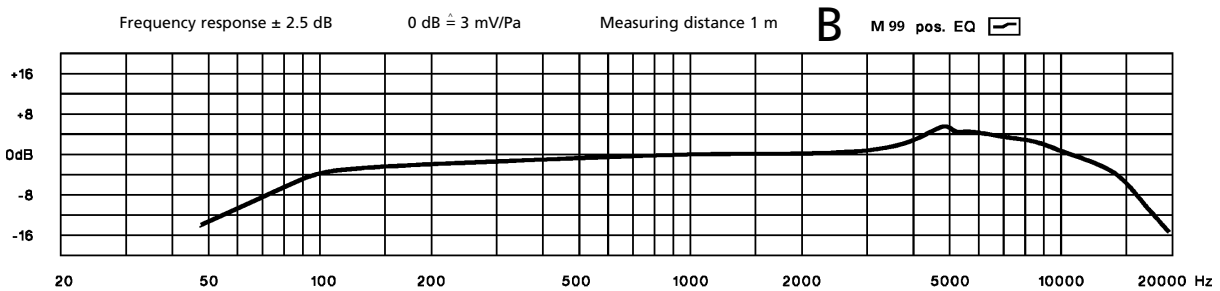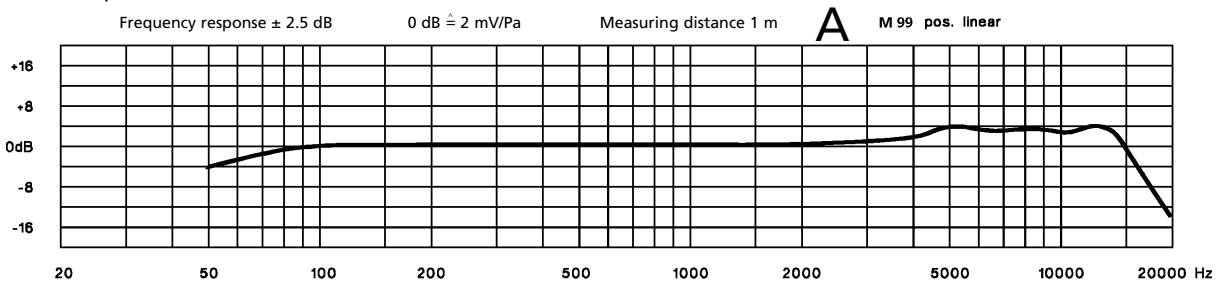

BASE VIEW



Photos are non-contractual. Contents subject to change without notice. Printed in Germany.