

Specifications:

Patterns:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Cardioid only
Frequency Range:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	30Hz to 16kHz, +/-2dB
Sensitivity:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	19mv/Pa (-34dBm=94dB SPL)
Equivalent Noise:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	18dB ("A" weighted)
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	32dB (unweighted)
Distortion vs.SPL @1kHz:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	112dB = 0.5% THD
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	118dB = 1% THD
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	129dB = 2% THD
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(increasing distortion is non-exponential, nearly linear, and primarily 2nd harmonic)
Impedance:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	200 Ohms true
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	transformer balanced
Recommended load:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1.2k Ohms
Dynamic range:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	94dB
S/N (94dB-noise):	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	76dB "A", 62dB unweighted
Capsule size:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1" diameter, dual asymmetrical backplate ck12 type
tube type:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	New Old Stock GES5670 triode
Dimensions:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2.04" dia x 8" oal (51x203mm)
Weight:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1lb 9.6oz (1.53lbs) =694g
Shipping weight:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	12 lbs
Power Supply:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Proprietary P251 true linear
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	factory wired for 115v or 230v

Features:

- Brite/ Normal switch for amazing versatility
- Works well for all vocal or instrumental use
- Tuned to work in a variety of studio situations
- Transformer balanced output
- Handpicked, individually tested capsule
- Select "New Old Stock" GES5670 tube is readily available
- Low noise, low distortion

☐


☐

☐

☐


System Includes 6 pin Tuchel cable, AC cable, wood box, shock mount, and shipping system.

151 Proximity Effect

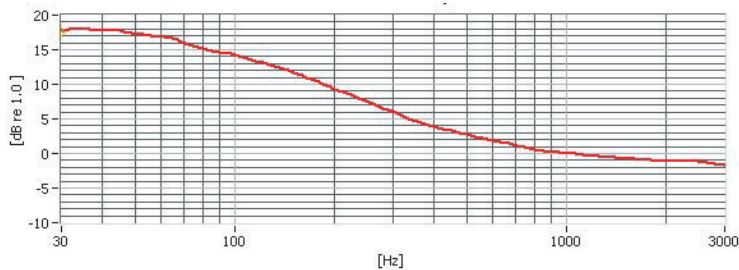

Bock 151 Maximum Proximity Effect ☐ 116dB peak SPL source 3cm from headgrille

151 on/off axis response

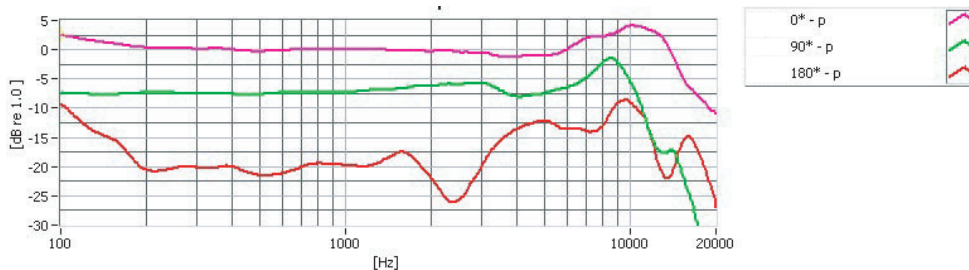

Bock 151 ☐ 0, 90, 180 deg ☐ sens = 20mV/Pa ☐ distance = 1 meter



The unique ck12 capsule

Bock Audio Warranty: Three years, parts and labor, on all microphones and power supplies. One year parts on tubes.

For warranty service, contact your dealer

Bock Audio Designs, 7320 Smoke Ranch Road, Suite G, Las Vegas, NV 89128 Sales: (702) 365-5155