


# NEVATON

nevatonusa.com

## MC416 Multi-Pattern Condenser Microphone

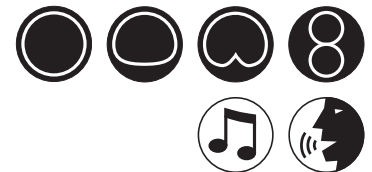

The Nevaton MC416 is a 4-pattern condenser microphone and an outstanding performer in radio and television broadcasting as well as studio recording. It features an an elastically-suspended symmetrical pressure gradient-type double diaphragm receiver. The two 33mm diaphragms are made of ultra-thin gold-sputtered polyethylene-terephthalate film. Transducer components have passed a special artificial aging process to guarantee long-term stability. The Class 'A' transformerless electronics use input transistors hand-selected for minimal self-noise. The microphone handles an extremely high SPL level with very low distortion.






The four directional characteristics (wide-cardioid, cardioid, omni, and figure-8) are set with a slider switch under the headgrille. A small window above this switch indicates the setting with symbols. A second slider switch introduces a pre-attenuation of about 10dB in the circuit for handling sound pressure levels up to 150dB. A small LED indicates front position and shows when phantom powering is active. The microphone body is made of brass with a dark grey non-reflective paint finish on an epoxy base. A 3-layer metallic grille effectively protects the transducers from microscopic dust contamination, mechanical impacts, and magnetic field influences. The transducer's head is mounted on an elastic suspension to minimize vibrations and handling noise. A gold-plated 3-pin XLR connector in the base provides output connection. Each Nevaton microphone is supplied with a printout of its individual frequency response, and comes with an output cable in a fine hardwood box. An isolation clip is also provided.

Exclusively distributed in the Americas by

**FDW**  
WORLDWIDE  
FDW-W.COM

8001 Terrace Ave. • Middleton, WI 53562 USA  
tel: 608-227-2040 • fax: 608-831-1890

## MC416 Technical Specifications

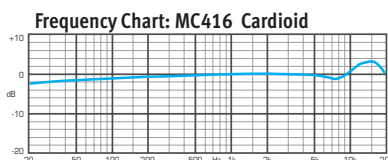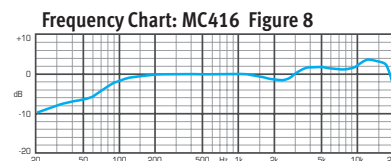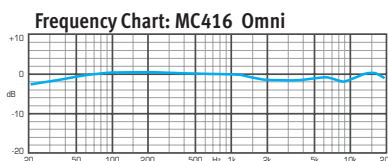

### Electronic Characteristics:

Acoustical operating principle:	Pressure gradient transducer
Fixed directional pattern:	Cardioid, wide cardioid, figure 8, omni
Frequency response:	20 Hz - 20 kHz
Output sensitivity:	15mV / Pa
Maximum SPL:	140 dB for 0.5% THD
Dynamic range:	< 120 dB
Self noise (DIN / IEC):	14 dB-A
Nominal impedance:	50 Ω
Recommended load:	1 k Ω
Phantom powering:	48V ± 4V
Current supply:	10 mA

### Switchable Options:

Pad 10 dB:	Yes
Filter / EQ:	No

### Physical Characteristics:

Transducer:	Ø 1.29" (33 mm)
Connector:	XLR-3M
Weight:	1 lb. 1.6 oz. (500 g)
Length:	9.80" (249 mm)
Minimum Diameter / Width:	1.18" (30 mm)
Maximum Diameter / Width:	1.96" (50 mm)

Exclusively distributed in the Americas by



8001 Terrace Ave. • Middleton, WI 53562 USA  
tel: 608-227-2040 • fax: 608-831-1890