

NEVATON

nevatonusa.com

MC49 Small-Diaphragm Condenser Microphone



The Nevaton MC49 is a high-quality, small-diaphragm microphone used to record a wide range of instruments including strings, brass, piano, acoustic guitar, and drums. While the MC49 delivers exceptional quality for single instrument recording, it truly excels when used to record groups such as full orchestras, chamber ensembles, and string quartets. It is also extremely effective for sampling and capturing ambient field recordings. Nevaton MC49s are used in many major studios and concert halls around the world, including the St. Petersburg Philharmonic.

The MC49 uses Class 'A' transformer-less circuitry and operates on 9-52V phantom power. Its 20mm capsule has a flat frequency response and a dynamic range of more than 120dB. The MC49's excellent impulse response captures the subject's finest details without coloration and its gold-sputtered, ultra-thin transducers pass and artificial aging process to ensure life-long stability.



Although unusual for a small capsule microphone, the MC49 has a dual-diaphragm design. Each part of the MC49's transducer is isolated and dedicated to its respective amplifier. This increases the sensitivity of the microphone up to 20mV/Pa, while continuing to handle sound pressure levels of 140dB. The MC49's transducer is mounted with an elastic suspension system to significantly reduce vibration and handling noise, and the body has a switch allowing easy transition from 10mV/Pa to the more sensitive 20mV/Pa.


The body of the MC49 is made of brass and is finished with dark gray non-reflective paint on an epoxy base. It is packaged in a fine hardwood box with a printout of its individual frequency response. An isolation clip is included. The MC49 is also available in stereo pair. Like all Nevaton microphones, the MC49 is 100% handmade, laboratory tested, and tuned with Brüel & Kjær equipment.

Exclusively distributed in the Americas by

FDW
WORLDWIDE
FDW-W.COM

8001 Terrace Ave. • Middleton, WI 53562 USA
tel: 608-227-2040 • fax: 608-831-1890

MC49 Technical Specifications

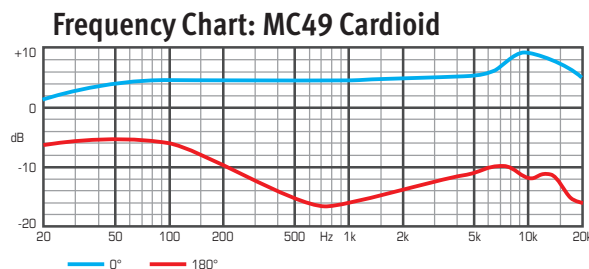

Electronic Characteristics:

Acoustical operating principle:	Pressure gradient transducer
Fixed directional pattern:	Cardioid
Frequency response:	20 Hz - 20 kHz
Output sensitivity:	10 / 20 ± 2mV / Pa
Maximum SPL:	140 dB for 0.5% THD
Dynamic range:	123 dB
Self noise (DIN / IEC):	17 dB-A
Nominal impedance:	50 Ω
Recommended load:	1 k Ω
Phantom powering:	12 - 48V
Current supply:	10 mA

Switchable Options:

Pad:	No
Filter / EQ:	Yes

Physical Characteristics:

Connector:	XLR-3M
Weight:	7.04 oz. (200 g)
Length:	7.67" (195 mm)
Maximum Diameter / Width:	0.9" (23 mm)

Exclusively distributed in the Americas by