

NT2-A

Multi Pattern 1" Condenser Microphone

RØDE
MICROPHONES




Features

- Large 1" (25mm) HF1 gold sputtered capsule
- On body control of polar pattern, HPF and PAD
- Three position variable polar pattern - Omni, Cardioid or Figure 8
- Three position variable High-Pass Filter - Flat, 40Hz or 80Hz
- Three position PAD - 0dB, -5dB or -10dB
- Ultra low noise, transformerless surface mount circuitry
- Includes SM6 shock mount with integrated pop filter, 3m XLR cable, dustcover and exclusive training DVD.
- Internal capsule shock mounting
- Designed and manufactured in Australia
- 10 year warranty*


Specifications

Acoustic Principle	Pressure, Pressure gradient	Directional Pattern	Three position variable - Omni, Cardioid or Figure 8
Frequency Range	20 Hz-20 kHz	Sensitivity	-36 dB re 1 Volt/Pascal (16 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedance	200Ω	Dimensions	Length - 209mm (8.2283") Diameter - 55mm (2.1653")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	1kg
Net Weight	860g		

Polar Pattern

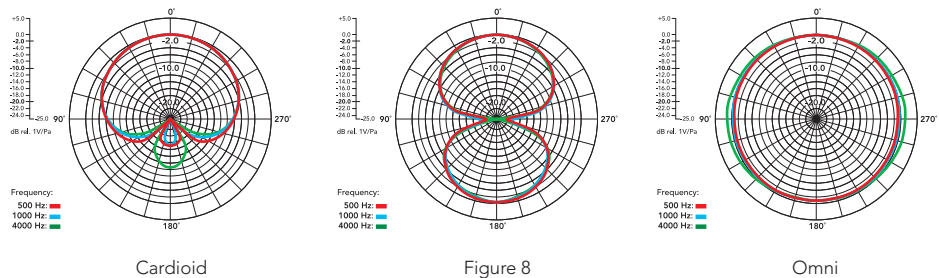

Frequency Response

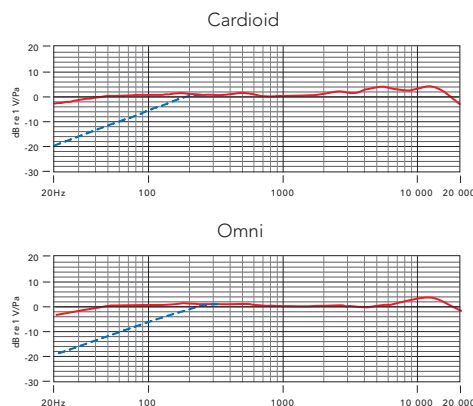

Included Accessories

- SM6 Shock mount
- 3m (10') XLR cable
- Microphone dustcover
- Exclusive NT2-A training DVD



www.rodemic.com



*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071